

Current Sensing Resistors-HOLR Series

Features



- 1,3,5 1 3,5 Watts
- 5% 1% Tolerance 5% or 1%
- TCR 20 ppm/ 50 ppm/
- 0.0025 Resistance values down to 0.0025ohms
- High temperature proof
- 10 Low Inductance
- Solderable copper leads
- ROHS Lead-free
- Special tight tolerance are available on request


Electrical Data

	HOLR-1	HOLR-3	HOLR-5
85 Power rating at 85 watts	1	3	5
Resistance range ohms	0.005Ω to 0.01 Ω	0.003Ω to 0.10 Ω	0.005Ω to 0.05 Ω


*Contact factory for values below 0.001 ohm

Dimensions Data

Type	W	H	D	E	F
JSR-1	10 1mm	5 3mm	4.5 0.7mm	0.8 0.1mm	2.0 3.0mm
JSR-3	15 1mm	20max	4.5 0.7mm	0.8 0.1mm	2.0 4.0mm
JSR-5	20 1mm	25max	4.5 0.7mm	0.8 0.1mm	2.4 6.0mm

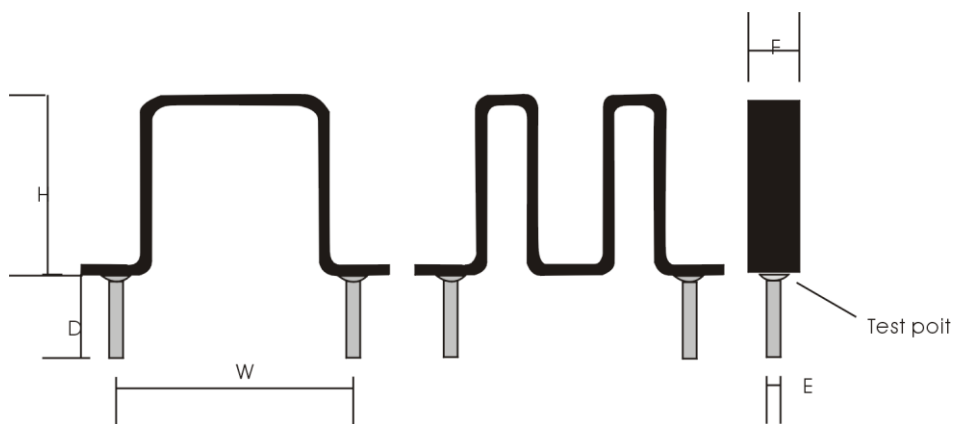

Order Information

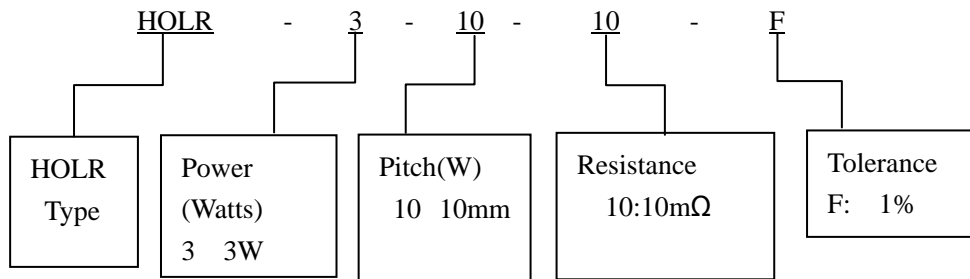

Applications

- Current Sensing
- Feedback
- Low Inductance
- Surge and pulse

Packaging

- 1000PCS bulk, 1000PCS per package